

ENDLESS
COLLECTION



800x1600 mm

800x1600 mm

AVAILABLE SIZES :

1200x
3200mm

THICKNESS : 15 MM
COLOR BODY

800x
3000mm

THICKNESS : 15 & 18 MM
FULL BODY | COLOR BODY

800x
2400mm

THICKNESS : 15 & 18 MM
FULL BODY | COLOR BODY

1200x
1600mm

THICKNESS : 15 MM
COLOR BODY

800x1600mm

A Perfect Size To Fix At All The Places And Fill Your Space With Graves. These Enormous Regular Size Tiles Are Made To Get Along With Uneven And Impartial Spaces With Utter Smoothness.

800x1600






Endless tiles have continuous vein matching patterns that fall into place no matter which way they are laid. The pattern will remain the same regardless of which tile face is placed anywhere. Endless tiles can give the impression of more space in your home or workplace.




Available Sizes ◀

800X1600 MM




9 MM
THICKNESS

800X2400 MM
800X3000 MM
800X3200 MM
1200X1600 MM
1200X2400 MM



15 MM
THICKNESS

1600X3200 MM



12 & 20 MM
THICKNESS


To find the most suitable size for your space to enhance your home environment could be delicate. It is essential to balance functionality and aesthetics, and to take into account the technical advantages of the different sizes.





ENDLESS 005



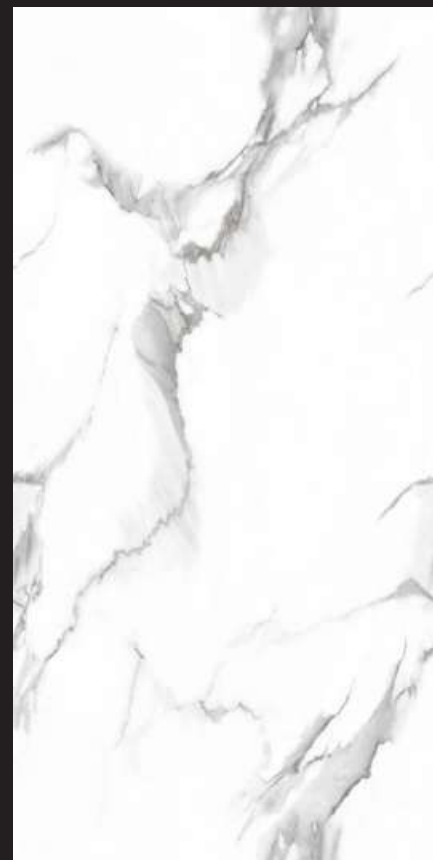

RANDOM FACES - 3

ENDLESS 005

FINISH
GLOSSY

SIZE
800x1600mm

ENDLESS
COLLECTION



ENDLESS 031





RANDOM FACES - 4

ENDLESS 031

FINISH
GLOSSY

SIZE
800x1600mm

ENDLESS
COLLECTION



ENDLESS GLOSTER GREY





RANDOM FACES - 3

ENDLESS GLOSTER GREY

FINISH
GLOSSY

SIZE
800x1600mm

ENDLESS
COLLECTION



ENDLESS LAPIS GREY





RANDOM FACES - 3

ENDLESS LAPIS GREY

FINISH
GLOSSY

SIZE
800x1600mm

ENDLESS
COLLECTION



Cleaning & Maintenance

Our products are non porous (due to their high quality raw materials, stringent production parameters and state of the art technology), hence any dust or deposited waste cannot penetrate the surface.

For most cases only a damp cloth is sufficient for cleaning.

Regular cleaning highlights the aesthetic features of the surface and gives it exceptional shine.

For highly aggressive cleaning caused by some common food and substances follow the table below.

| TYPE OF STAIN | CHEMICAL PRODUCT | EXAMPLE |
|---------------|--------------------|--|
| Grease | Alkaline - Solvent | Detergent Ammonia, Backing Soda |
| Oil | Solvent Oxidant - | Alcohol, Liquid Bleach, Nail Paint Remover |
| Ink | Solvent Acid Acid | Hydrochloric Acid, Vinegar, Red Harpic |
| Rust | Acid Alkaline | Descaling Reagent, Hydro Chloric Acid |
| Lime | Alkaline - Solvent | Hydro Chloric Acid Ammonia, Liquid |
| Cement | Solvent Acid | Bleach Ammonia, Liquid Bleach Alcohol, |
| Wine | Solvent Oxidant | Thinner Hydro Chloric Acid Alcohol, |
| Coffee | Oxidant Alkaline | Thinner Liquid Bleach Liquid Bleach Liquid |
| Rubber | | Bleach |
| Plaster | | |
| Candle Wax | | |
| Iodine | | |
| Blood | | |
| Ice Cream | | |
| | | |

Note: It is recommended that any kind of stain needs to get clean immediately / as soon as possible.

Technical Specification

| CHARACTERISTIC | STANDARD AS PER ISO13006:2018/ EN14411 Gr.Bla | MEAN VALUE | TEST METHOD |
|--|---|----------------------------------|-----------------|
| Regulatory Properties Deviation in | | | |
| Length and Width | ± 0.30 % (±1.00mm) | ± 0.10 % ± 5.00 % ± | ISO 10545-2 |
| Deviation in Thickness | ± 5.00 % (±0.50mm) | 0.10 % ± 0.10% ± | ISO 10545-2 |
| Straightness in Side | ± 0.30 % (±0.80mm) | 0.50 % ± 0.50 % ± | ISO 10545-2 |
| Rectangularity | ± 0.30 % (±1.50mm) | 0.50 % >95% | ISO 10545-2 |
| Surface Flatness Central Curvature | ± 0.40 % (±1.80mm) | deects free ΔE < | ISO 10545-2 |
| Surface Flatness Edge Curvature | ± 0.40 % (±1.80mm) | 0.30 Gloss Value> | ISO 10545-2 |
| Surface Flatness Warpage | ± 0.40 % (±1.80mm) | 90 3 <Gloss | ISO 10545-2 |
| Surface Quality | >95% deects free ΔE | Value<7 7<Gloss | ISO 10545-2 |
| Small Color Difference(for Plain Colour) | < 1.00 as per mfg. as | Value<18 | ISO 10545-16 |
| Glossiness (Polished) | per mfg. as per mfg. | | Gloss Meter 60° |
| Glossiness (Matt) | | | Gloss Meter 60° |
| Glossiness (Satin/Posh) | | | Gloss Meter 60° |
| Structural Properties Water absorption | | | |
| Bulk density Massive Mechanical | ≤ 0.50 % | ≤ 0.060 % | ISO 10545-3 |
| Properties Modulus of rupture Breaking | as per mfg. | Min. 2.28 g/cc | ISO 10545-3 |
| strength thickness <7.5 Breaking | | | |
| strength thickness ≥7.5 Breaking | Min. 35.0 N/mm² | Min. 42.0 N/mm² | ISO 10545-4 |
| strength thickness ≥(175.5mm) | Min. 700.0 N | Min. 1000.0 N | ISO 10545-4 |
| Surface Mechanical Properties | Min. 1300.0 N | Min. 1800.0 N | ISO 10545-4 |
| MOH'S hardness # | Min.1300.0 N | Min. 7500.0 N | ISO 10545-4 |
| Surface abrasion resistance # | | | |
| Deep abrasion resistance # | as per mfg. | Glossy Min. 4*/ Posh Min. 6 | BS EN 15771 |
| Thermal Hydrometric Properties | as per mfg. | Glossy Min. 2/ Posh Min. 3 | ISO 10545-7 |
| Moisture expansion | Max. | Max. 132mm3 | ISO 10545-6 |
| Thermal expansion(COE) at 100°C | 175m3m | | |
| Thermal shock resistance | | | |
| Impact resistance(COR) # | Max. 0.06%(0.6mm/m) | Max. 0.02mm/m | ISO 10545-10 |
| Frost resistance | as per mfg. | Max. 6.0 x 1-06 | ISO 10545-8 |
| Chemical Properties | Min. 10 Cycle | Min. 10 Cycle | ISO 10545-9 |
| Resistance to staining glazed | Min. 0.55 | Min. 0.55 | ISO 10545-5 |
| Resistance to household chemicals & swimming pool salts glazed | as per mfg. | Frost Proof | ISO 10545-12 |
| Resistance to low concentrate acid and alkalis glazed | Min. Class 3 | Min. Class 4 | ISO 10545-14 |
| Resistance to high concentrate acid and alkalis glazed | Min. Class GB | Min. Class GA | ISO 10545-13 |
| Safety Properties | as per mfg. | Min. Class GLB** | ISO 10545-13 |
| Skid resistance(DCOF-DRY) ## | as per mfg. | Min. Class GHB** | ISO 10545-13 |
| Slip resistance(DCOF)(R value) ## | | | |
| Fire resistance | | | |
| | as per mfg. | Glossy P0(<12) / Posh ≥P1(12-24) | BS 7976-2 |
| | as per mfg. | R9 to R13 | DIN 51130 |
| | as per mfg. | Fire Proof | N.A. |

*With Nano polishe
** Except Hydrofluoric Acid & it's compound
Tiles Intended for use on floor
As per customer requirement

Packing Details

| PRODUCT | SIZE | THICKNESS | TILES / BOX | COVERAGE AREA / BOX | WEIGHT (Kg) |
|--------------------|------------|-----------|-------------|---------------------|-------------|
| Endless Collection | 800x1600mm | 9mm | 2pc | 27.55 Sq ft | 53 Kgs |